
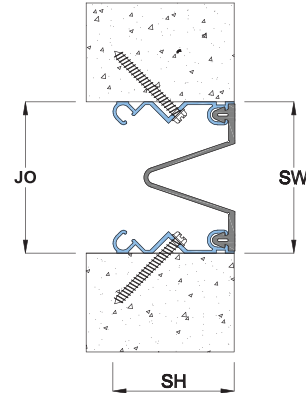



## Features

- Recess mounted system ideal for quick installation
- Firmly fixed dual durometer Santoprene gasket offers movement tractability without shearing or breaking
- Centering Bar system for wider gaps
- Extra-large sizes available
- Suitable for internal / external applications
- Fire Barriers are optionally available
- System is suitable for full seismic movements
- Commonly used system that is easy to install and maintain

### Straight Application FKS



### Corner Application FKC

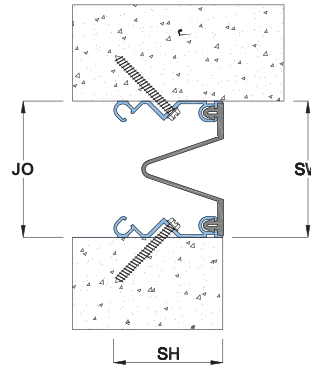

Seal Colors:

- BK
- BG
- WH
- GY

- FK Series
- EXT. Application
- INT. Application
- Seismic Movement
- WALL USE
- CEILING USE

Application	Code	JO	SH	SW	± Movement (%)		Load (Ton)
		Millimeter			Horizontal	Vertical	
Straight (S)	FKS 01	42	60	42	50	50	Excellent *
	FKS 02	51	60	51	50	50	Excellent *
	FKS 03	76	60	76	50	50	Excellent *
	FKS 04	102	60	102	50	50	Excellent *
	FKS 06	152	60	152	50	50	Excellent *
	FKS 08	203	75	203	50	50	Excellent *
	FKS 10	254	75	254	50	50	Excellent *
	FKS 12	305	75	305	50	50	Excellent *
	FKS 18	457	75	457	50	50	Excellent *
FKS 24	610	75	610	50	50	Excellent *	
Corner (C)	FKC 01	42	60	42	50	50	Excellent *
	FKC 02	51	60	51	50	50	Excellent *
	FKC 03	76	60	76	50	50	Excellent *
	FKC 04	102	60	102	50	50	Excellent *
	FKC 06	152	60	152	50	50	Excellent *
	FKC 08	203	75	203	50	50	Excellent *
	FKC 10	254	75	254	50	50	Excellent *
	FKC 12	305	75	305	50	50	Excellent *
	FKC 18	457	75	457	50	50	Excellent *
FKC 24	610	75	610	50	50	Excellent *	

## Details

Usage : Wall/Ceiling

Joint width : 1"- 24"

Optional : Fire Barrier

Wider Joint Cover available at request

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.