
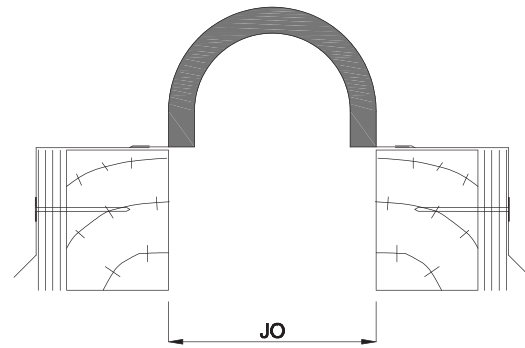


Features

- System designed for surface mount installation
- EPDM bellows with GI flanges are suitable for harsh weather conditions
- System remains watertight even during severe cyclical seismic movements
- System is suitable for full seismic movements
- Factory formed transitions available
- Copper / Stainless Steel flanges are available
- Splicing Kit available for making on-site directional changes

Straight Application SAS

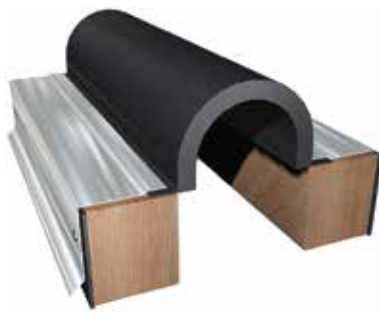


SA
Series

EXT.
Application

Seismic
Movement

ROOF
USE

Corner Application SAC

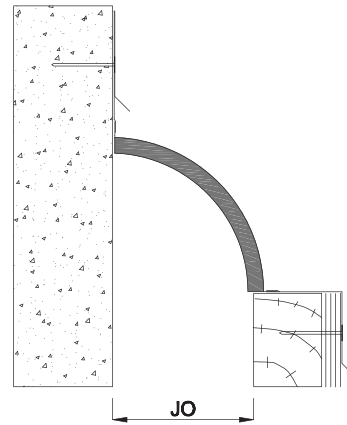

Details

Usage : Roof

Joint width : 2" - 8"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	SAS 02	51	*	*	50	50	Excellent	*
	SAS 03	76	*	*	50	50	Excellent	*
	SAS 04	102	*	*	50	50	Excellent	*
	SAS 06	152	*	*	50	50	Excellent	*
	SAS 08	203	*	*	50	50	Excellent	*
Corner (C)	SAC 02	51	*	*	50	50	Excellent	*
	SAC 03	76	*	*	50	50	Excellent	*
	SAC 04	102	*	*	50	50	Excellent	*
	SAC 06	152	*	*	50	50	Excellent	*
	SAC 08	203	*	*	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.