
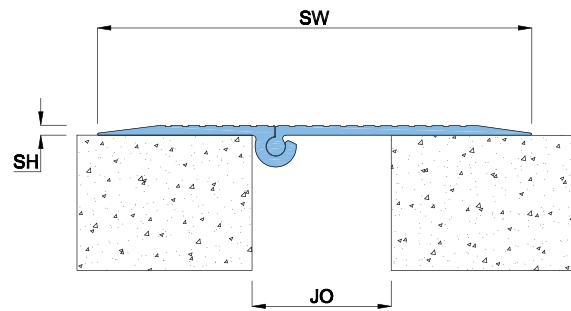


Features

- System designed to be installed over floor surface
- Extremely popular in uneven floor conditions
- System allows minor seismic movements
- System allows excellent shear movements
- Recommended for light vehicular load
- Fire Barriers are optionally available

Straight Application HFS

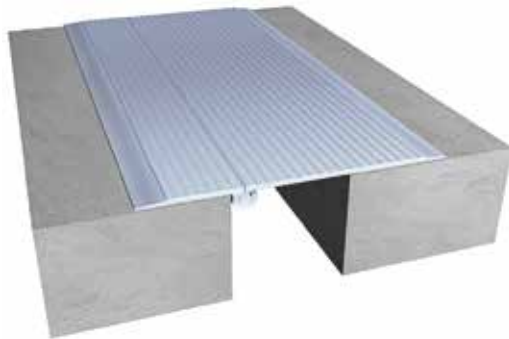

HF
Series



EXT.
Application

INT.
Application

Seismic
Movement

FLOOR
USE

Corner Application HFC

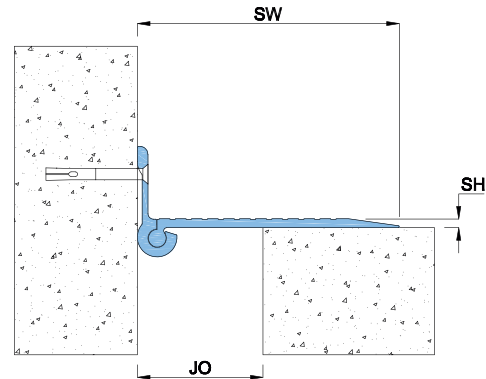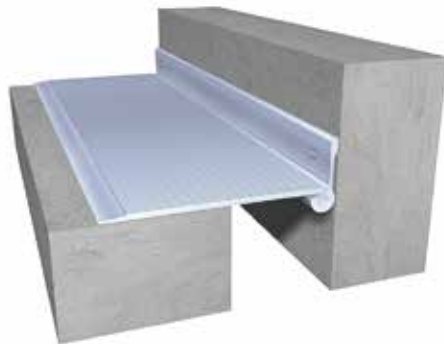

Details

Usage : Internal Floor

Joint width : 2" - 8"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	HFS 02	51	5	178	50	25	Excellent	1.5
	HFS 03	76	5	202	50	25	Excellent	1.5
	HFS 04	102	8	267	50	25	Excellent	1.5
	HFS 06	152	8	330	50	25	Excellent	1.5
	HFS 08	203	10	425	50	25	Excellent	1.5
Corner (C)	HFC 02	51	5	102	50	25	Excellent	1.5
	HFC 03	76	5	126	50	25	Excellent	1.5
	HFC 04	102	8	191	50	25	Excellent	1.5
	HFC 06	152	8	254	50	25	Excellent	1.5
	HFC 08	203	10	330	50	25	Excellent	1.5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.