
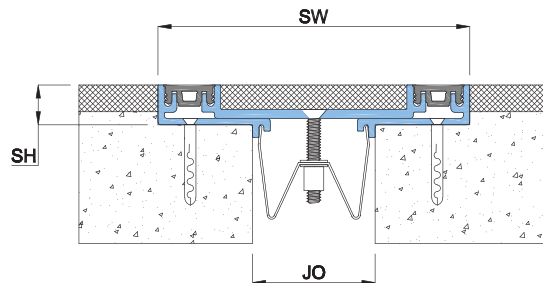


Features

- System is designed to be installed in recessed floor/wall
- Installation is recommended for up-to 10mm thick Ceramic Tiles / Marble / Granite / Wood or Carpet finishes
- Stainless Steel central spring clips / flanges allows swift shift between positive and negative movements
- Firmly fixed Santoprene gasket offer ideal movement tractability without shearing or breaking
- No bump structure is ADA compliant
- System is suitable for minor seismic movements
- Allows minor shear movements
- Suitable for heavy pedestrian traffic and trollies
- Vapor and Fire Barriers are optionally available

Straight Application BWS

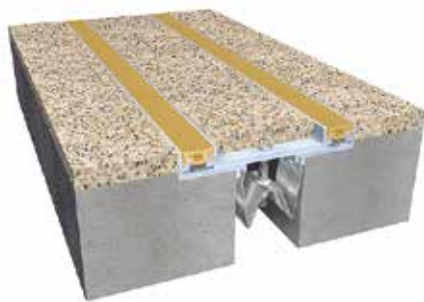

Seal Colors:

BK



BG

WH

GY

- BW Series
- INT. Application
- Thermal Movement
- FLOOR USE
- WALL USE

Corner Application BWC

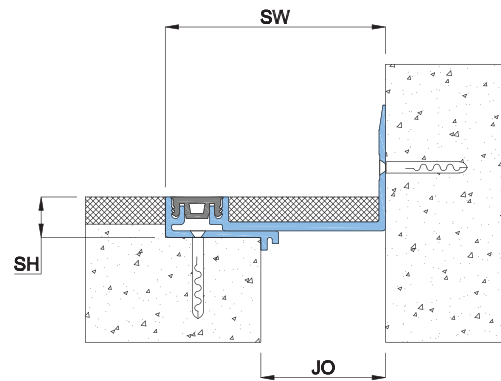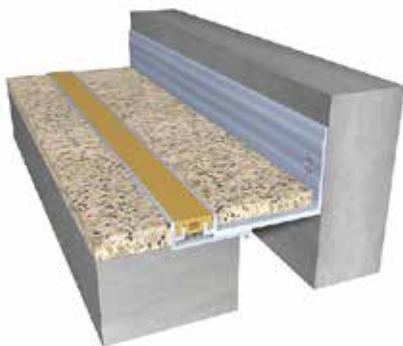

Details

Usage : Internal Floor/Wall

Joint width : 2" - 8"

Optional : Vapor/Fire Barrier

| Application | Code | JO | SH | SW | ± Movement (%) | | | Load (Ton) |
|--------------|--------|------------|----|-----|----------------|----------|-------|------------|
| | | Millimeter | | | Horizontal | Vertical | Shear | |
| Straight (S) | BWS 02 | 51 | 16 | 125 | 25 | 25 | Minor | 3 |
| | BWS 04 | 102 | 16 | 240 | 25 | 25 | Minor | 2 |
| | BWS 06 | 152 | 16 | 290 | 16 | 16 | Minor | 1 |
| | BWS 08 | 203 | 16 | 340 | 12 | 12 | Minor | 1 |
| Corner (C) | BWC 02 | 51 | 16 | 90 | 12.5 | 12.5 | Minor | 3 |
| | BWC 04 | 102 | 16 | 170 | 12.5 | 12.5 | Minor | 2 |
| | BWC 06 | 152 | 16 | 220 | 8.5 | 8.5 | Minor | 1 |
| | BWC 08 | 203 | 16 | 270 | 6 | 6 | Minor | 1 |

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.