



Features

- System designed for road and bridges application
- Waterproof / Watertight
- Aluminum grade is 6061-T6
- Elastomeric seal profile for watertight application
- Use adhesive for secure installation
- System allows excellent shear movements
- Resistant to dynamic rolling loads and impacts
- System designed for cast-in-place installation

Straight Applications FFS

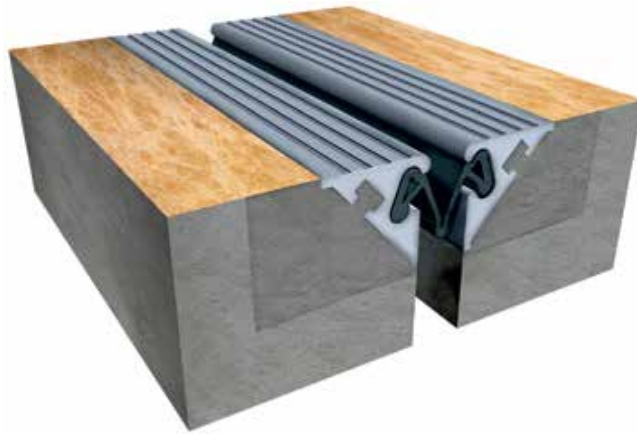

- FFS Series
- EXT. Application
- INT. Application
- FLOOR USE
- Seismic Movement

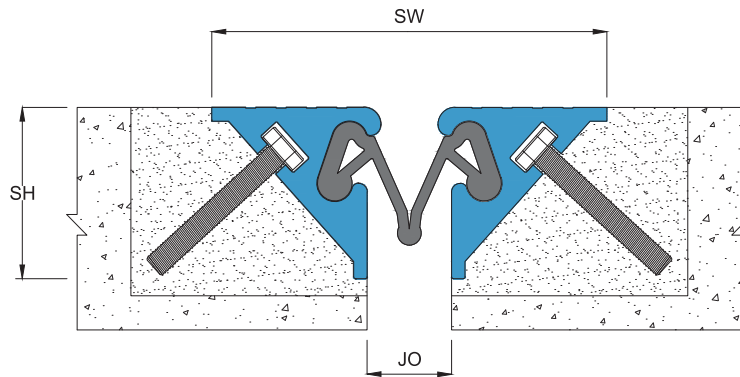

Details

Usage : Road & Bridges

Joint width : 01" - 02"

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	FFS 01	25	50	117	50	50	Excellent	Heavy Vehicular
	FFS 02	51	50	142	50	50	Excellent	Heavy Vehicular

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers the company reserves the right to modify the specifications of its products without notice