


Features

- System designed for external / internal floors
- Santoprene/Neoprene Seal for car parks and bridge decks
- Elastomeric Concrete header designed to withstand heavy traffic
- Suitable for watertight applications
- System allows excellent shear movements
- Meets acoustic requirements range up to 72 STC
- UV stabilized
- System allows good seismic movements

Straight Application KCS

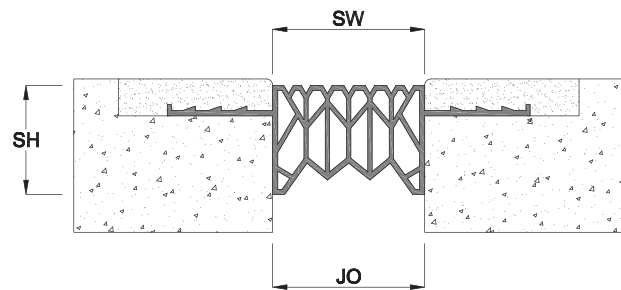

KC
Series


EXT.
Application

INT.
Application

Thermal
Movement

FLOOR
USE

Corner Application KCC

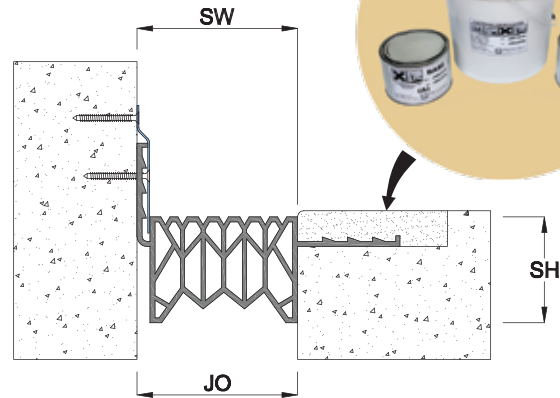

Details

Usage : Floor

Joint width : 1" - 6"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	KCS 01	25	40	25	25	10	Excellent	5
	KCS 02	51	54	51	25	10	Excellent	5
	KCS 03	76	54	76	25	10	Excellent	5
	KCS 04	102	54	102	25	10	Excellent	5
	KCS 05	127	54	127	25	10	Excellent	5
	KCS 06	152	54	152	25	10	Excellent	5
Corner (C)	KCC 01	25	40	25	25	10	Excellent	5
	KCC 02	51	54	51	25	10	Excellent	5
	KCC 03	76	54	76	25	10	Excellent	5
	KCC 04	102	54	102	25	10	Excellent	5
	KCC 05	127	54	127	25	10	Excellent	5
	KCC 06	152	54	152	25	10	Excellent	5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.