
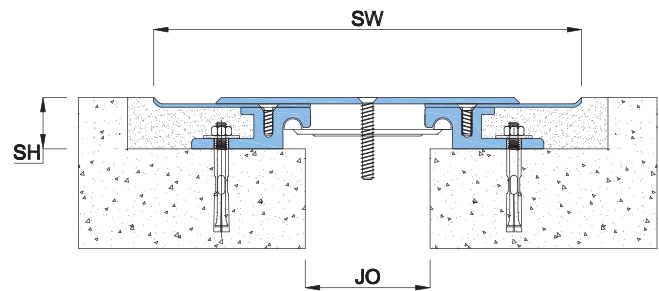



Features

- System designed to be installed in recessed floor
- Central plate and wings of construction grade aluminium
- Steel central flanges allows swift shift between positive and negative movements
- Load rated for heavy vehicular traffic
- Vapor and Fire Barriers are optionally available
- System allows excellent shear movements
- System allows full seismic movements

Straight Application GUS

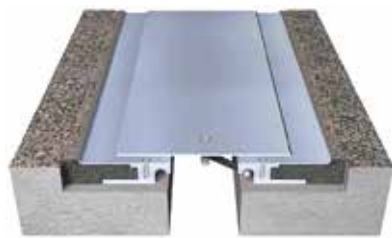

Corner Application GUC

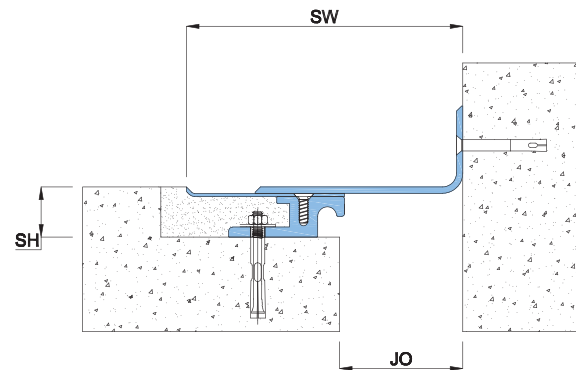

- GU**
Series
- EXT.**
Application
- INT.**
Application
- Seismic**
Movement
- FLOOR**
USE

Details

Usage : Floor

Joint width : 2"-12"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	GUS 02	51	30	201	50	50	Excellent	3
	GUS 03	76	31	261	50	50	Excellent	3
	GUS 04	102	31	322	50	50	Excellent	3
	GUS 06	152	37	452	50	50	Excellent	2
	GUS 08	203	37	578	50	50	Excellent	2
	GUS 10	254	37	714	50	50	Excellent	2
GUS 12	305	40	830	50	50	Excellent	2	
Corner (C)	GUC 02	51	30	129	50	13	Excellent	3
	GUC 03	76	31	173	50	13	Excellent	3
	GUC 04	102	31	226	50	13	Excellent	3
	GUC 06	152	37	331	50	13	Excellent	2
	GUC 08	203	37	431	50	13	Excellent	2
	GUC 10	254	37	531	50	13	Excellent	2
GUC 12	305	40	639	50	13	Excellent	2	

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.